
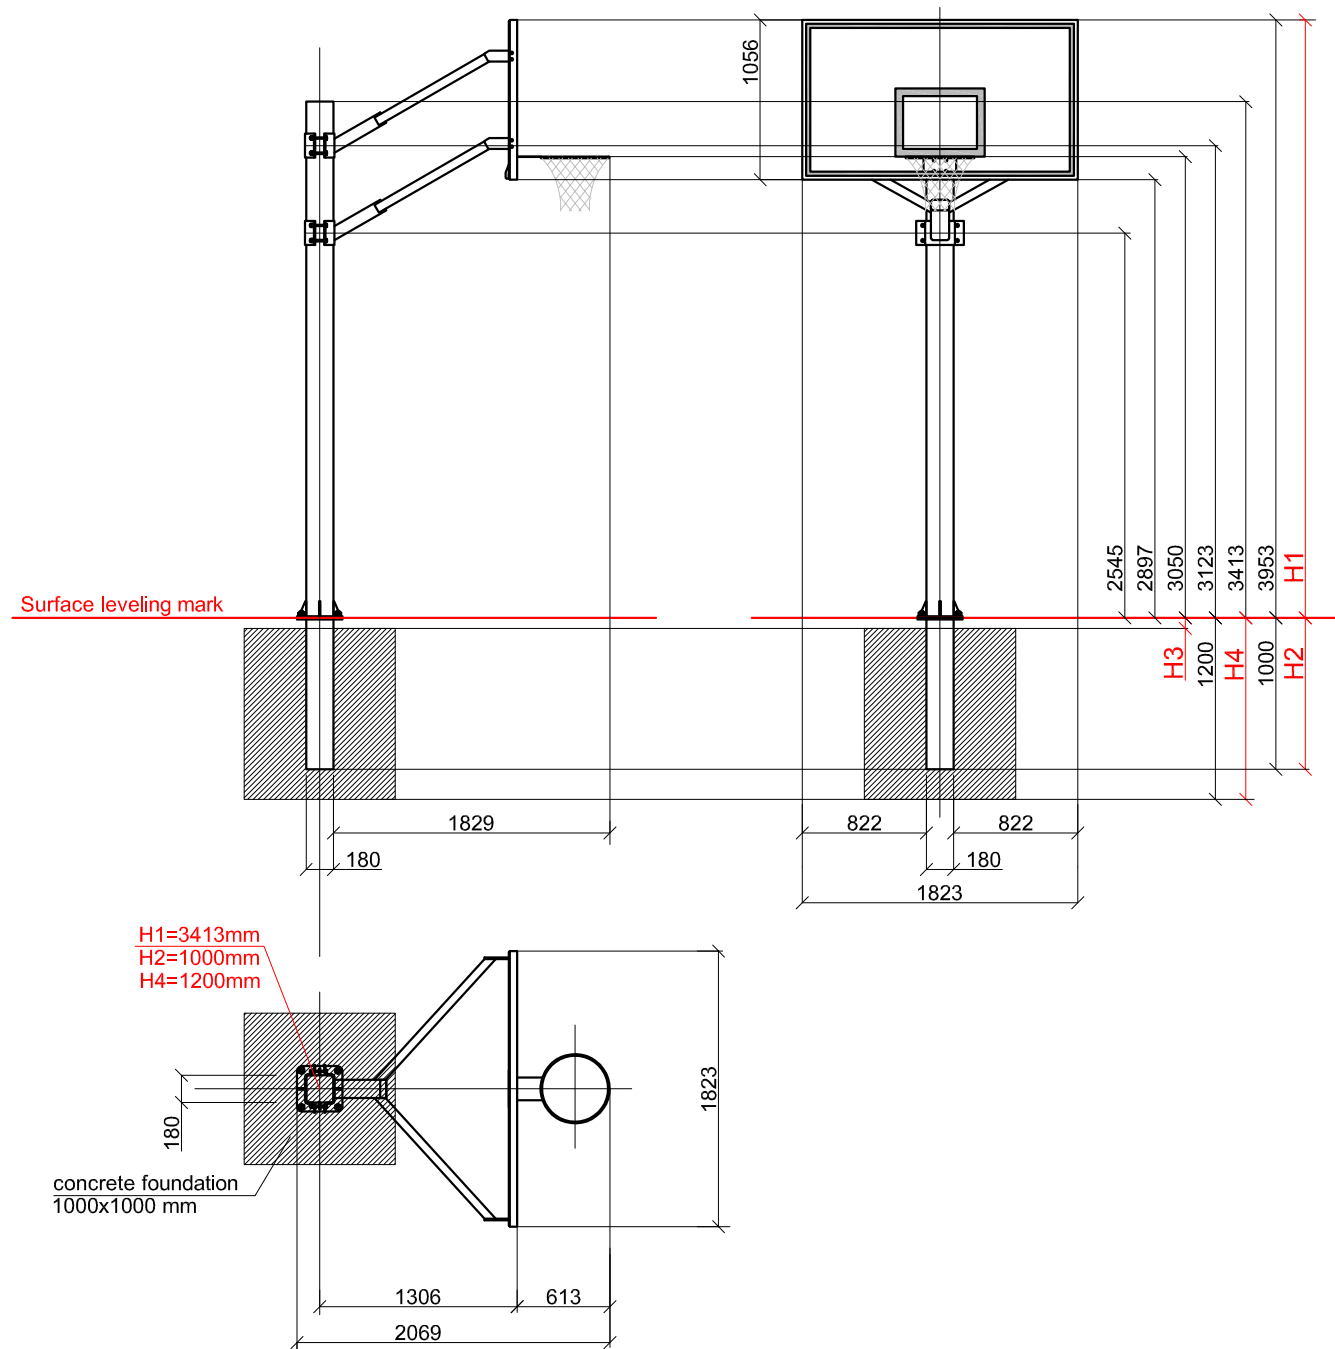


SCALE 1:50



**KENGURU
PRO**

"KENGURU PRO" LTD

Address: Lauteres street 4, Riga, Latvia, LV-1002
 VAT Reg. No. 40103750152
 Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

KENGURU Basketball



The structure consists of a vertical column 3413 mm in height, two connecting profiles and a basketball hoop with a shield. Dimensions of the shield are 1823 x 1056 mm, thickness - 10 mm, height of the basket hoop from the ground - 3050 mm.

Installation instructions:

- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Ready-made C25 concrete should be used.
- Backboard installation height can be changed according to customer's wishes.
- Approximately 1,00 m³ concrete is needed for each spot foundation.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Technical information

width:	1823 mm	
height:	3953 mm	
length:	2069 mm	
largest part:	3413 mm	
weight:	253,0 kg	
profile measurements:	size:	wall thickness:
	180x180 mm	6 mm
	120x80 mm	4 mm
	60x30 mm	3 mm
metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)	